FFDG 65 Series



Complete Kits:

Components:

FFDG 6532 32" Complete Kit

FFDG 6536 36" Complete Kit

FFDG 6542 42" Complete Kit

FFDG 6548 48" Complete Kit

FFDG 6560 60" Complete Kit

DA 6532 32" Stainless Steel Grate

DA 6536 36" Stainless Steel Grate

DA 6542 42" Stainless Steel Grate

DA 6548 48" Stainless Steel Grate

DA 6560 60" Stainless Steel Grate

FC 6532 32" Stainless Steel Fixed Channel FC 6536 36" Stainless Steel Fixed Channel

FC 6542 42" Stainless Steel Fixed Channel

FC 6548 48" Stainless Steel Fixed Channel FC 6560 60" Stainless Steel Fixed Channel

FFDG 65 Fixed Length


- 16 gauge 304 Stainless Steel grate and channel
- Pre-pitched channel with "Fixed" lengths and "Fixed" center vertical (down) outlet location
- Not site sizeable

Finishes:


- Indoor or outdoor use
- Bonded "Flange" installation for flush against the wall.
- Lowest height for curbless installations
- Uses Liquid and Fabric Sheet Membrane waterproofing
- Grate can be removed completely for cleaning
- Flow rate 9 GPM per outlet* *Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.



Installation (FF) Fixed Flange

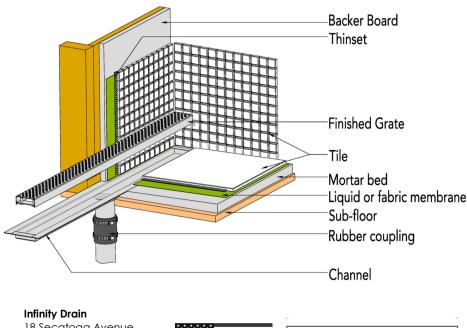

18 Secatoag Avenue Port Washington, NY 11050 Phone: 516.767.6786 Fax: 516.740.3066 www.InfinityDrain.com




Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Page 1 of 2

Dimension are subject to Manufacturers tolerance and change without notice. We can assume no responsibility for use of superseded or void data.

FFDG 6532 Specifications ID Infinity Drain

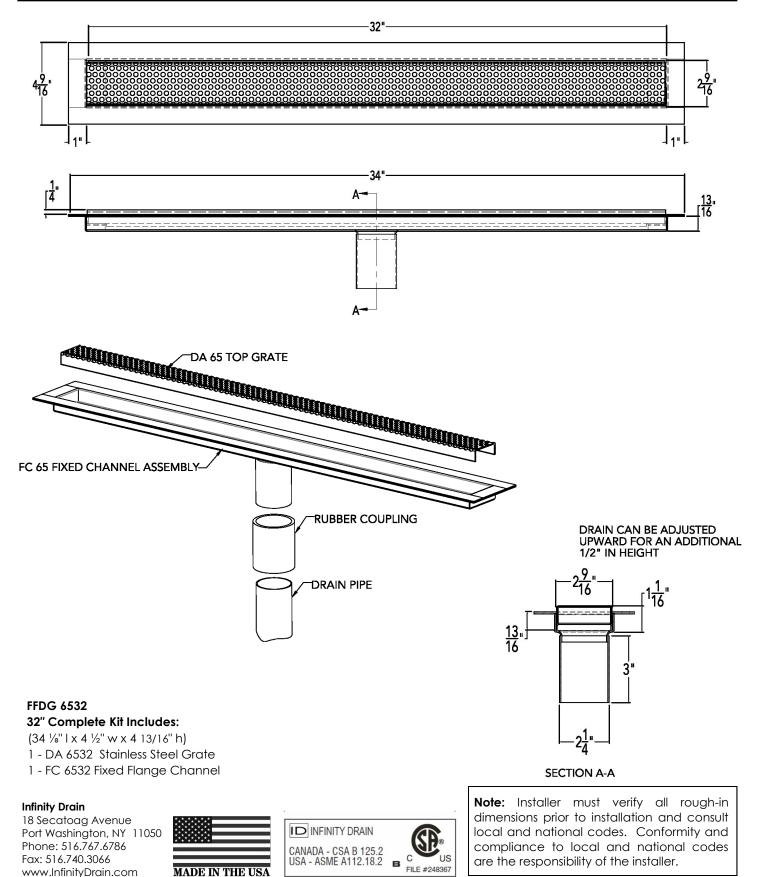

Page 2 of 2

Dimension are subject to Manufacturers tolerance and change without notice. We can assume no responsibility for use of superseded or void data.