FXAS 65 Series




FXAS 65 | Fixed Length

- 12 gauge 316 Stainless Steel grate and channel
- Pre-pitched channel with "Fixed" lengths and "Fixed" center outlet
- Not site sizeable
- Indoor or outdoor use
- Works with 2" clamp down floor drain with 2" throat (strainer size) (not included)
- Uses Hot Mop, Lead Pan, PVC Vinyl Liner, Rubber Liner (Chloraloy™)
 Copper Pan or Fiberglass waterproofing
- Grate can be removed completely for cleaning
- Flow rate 9 GPM per outlet*
 - *Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.



Installation (FX) Fixed

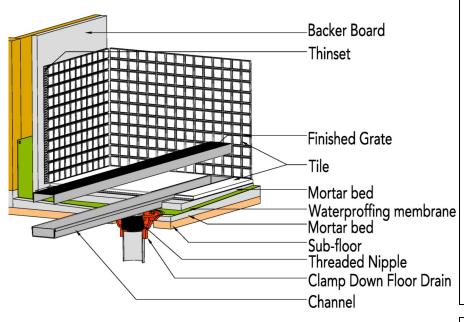

Infinity Drain

18 Secatoag Avenue Port Washington, NY 11050 Phone: 516.767.6786 Fax: 516.740.3066 www.InfinityDrain.com



CANADA - CSA B 125.2 USA - ASME A112.18.2



Complete Kits:

FXAS 6532 32" Complete Kit FXAS 6536 36" Complete Kit FXAS 6542 42" Complete Kit FXAS 6548 48" Complete Kit FXAS 6560 60" Complete Kit

SA 6532 32" Stainless Steel Grate

Components:

Add Clamp Down Drain:

CDA 22 Clamp Down Drain ABS
CDI 22 Clamp Down Drain Cast Iron
CDP 22 Clamp Down Drain PVC



TNRN

2" clamp down drain not included in kit

Stainless Steel Threaded Nipple


Optional Components:


(3" extension)
UCP 2 Universal 2" Clamping Plate
UCP 4 Universal 4" Clamping Plate
ERB Eccentric Reducer Bushing 4"x2"

Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

FXAS 6560 Specifications



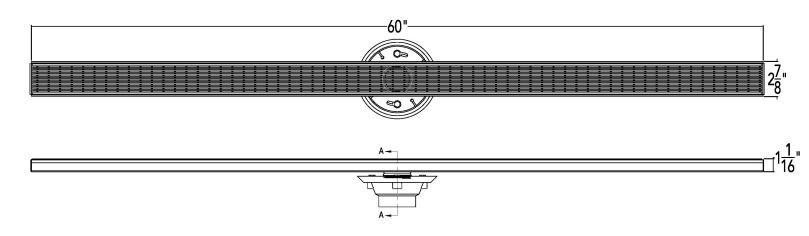

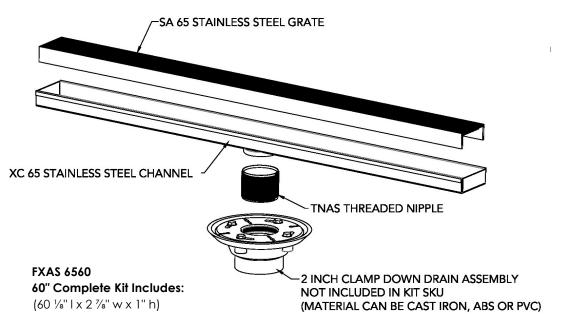

1 - SA 6548 Stainless Steel Grate

- 1 XC 6548 Fixed Channel
- 1 TNAS Threaded Nipple

Add Clamp Down Drain:

CDA 22 Clamp Down Drain ABS

CDI 22 Clamp Down Drain Cast Iron

CDP 22 Clamp Down Drain PVC



2" clamp down drain not included in kit


Infinity Drain

18 Secatoag Avenue Port Washington, NY 11050 Phone: 516.767.6786 Fax: 516.740.3066 www.InfinityDrain.com



INFINITY DRAIN
CANADA - CSA B 125.2
USA - ASME A112.18.2



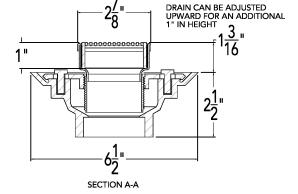

Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Page 2 of 2