

FF Series

Parts List

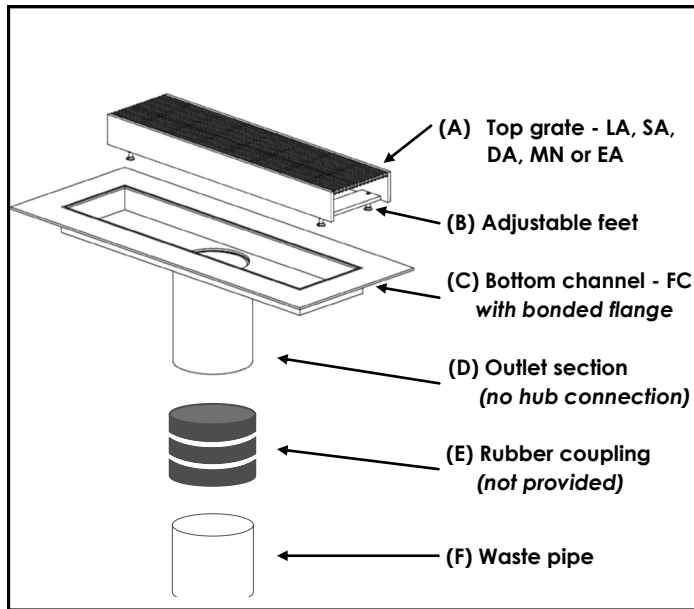


Figure 1

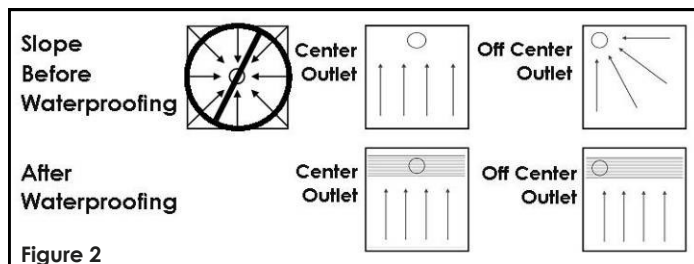


Figure 2

FFED 25, FFDG 25, FFMN 25, FFAS 25, FFED 65, FFDG 65, FFMN 65, FFAS 65, FFAS 125 and FFTIF 65 Installation

Installation Instructions

1. The Fixed Flange Series installs per IAPMO IGC 195-2010. Waterproof per Tile Council North America, B422-09, using ANSI 118/10 approved waterproofing.
2. Connect outlet (D) to waste pipe (F) via no hub connection using a rubber coupling (E)* (*not provided). Note: outlet section (D) is 3" long and can be modified for height adjustment. Grate (A) has adjustable feet for finer adjustment (Minimum tile height 1/4", maximum tile height 3/4") **NOTE:** 125 Series has a 3" diameter outlet section.
3. Using a mortar bed, set and level channel (C).
4. Spread mortar bed, slope 1/4" per foot away from drain in a single plane. Note: tile height finishes 1/16" higher than grate height.
5. Apply waterproofing per manufacturer's instructions. Note: Waterproofing onto all four sides of 1" channel (C) flange. **Do not** waterproof inside bottom of channel.
6. Take measure to protect grate (A) prior to tiling. Keeping the grate (A) in the channel (C) thin set and tile onto bonded flange. Ensure tile allows for clearance of grate removal (A). Tile finishes 1/16" higher than grate.
7. Adjust grate (A) height with adjustable feet (B) as needed. The minimum height is achieved by removing adjustable feet/screws. **NOTE:** FFTIF Series (LA) grate does not have adjustable feet. **NOTE:** (LA) Grate is for a Tile Insert. (LA) Grate interior will accommodate up to a 3/8" Tile. Use a thin set or adhesive to set tile into grate. When using the FFTIF, the maximum finish floor height should be 1/2".

Infinity Drain recommends this product be installed by a licensed contractor

