# ID Infinity Drain



# **FCBST Slot Drain**


## **Double Waterproofing Series**

- FCBST 24 24" Complete Kit
- FCBST 32 32" Complete Kit
- FCBST 36 36" Complete Kit
- FCBST 42 42" Complete Kit
- FCBST 48 48" Complete Kit
- FCBST 60 60" Complete Kit

### **Features**

- Pre pitched Fixed Flange channel with center 2" threaded outlet
- Indoor or outdoor use
- 12 gauge Tile Insert clean out
- 16 gauge, 304L Stainless Steel Slot and Channel Assembly
- Tile Insert can be removed for cleaning
- NOT Site Sizable®

- Compatible with:
  - Primary waterproofing: PVC Liner, Rubber Liner, Hot Mop, CopperPan, Lead Pan, or Fiberglass
  - Secondary waterproofing: liquid applied or fabric sheet membrane
- Flow rate 9 gpm per outlet
  - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
  - Additional outlets can be added and combined into a larger waste line to increase flow rates

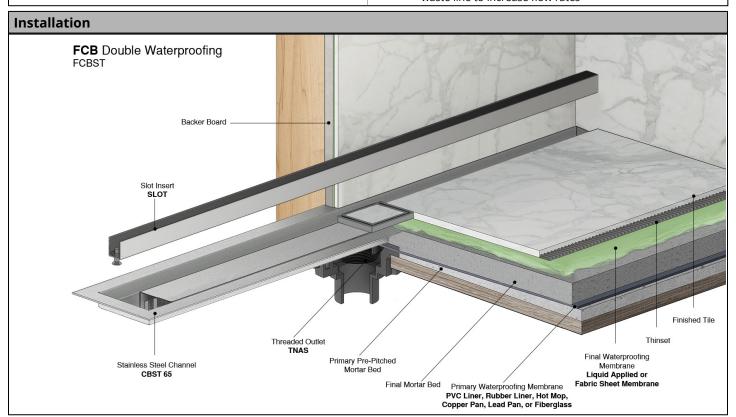


## **Care & Maintenance**

FCBST 65 stainless steel linear drains are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite® may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

## **Infinity Drain**


145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.infinitydrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

# O Infinity Drain

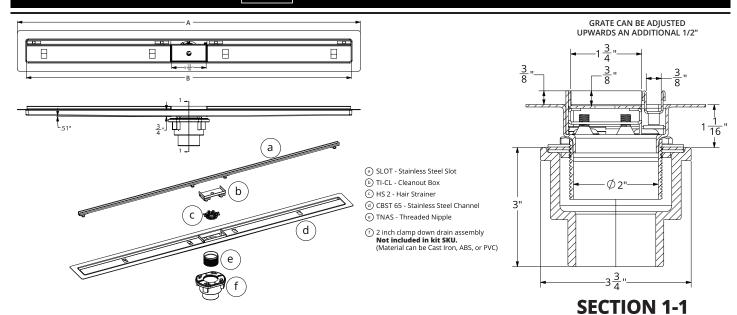

Model Number	Complete Kit Contents		<b>A</b> (Maximum Overall Length)	<b>B</b> (Maximum Grate Length)
FCBST 6524	1 - 24" Slot 1 - CST 24 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - TNAS Threaded Nipple	1 - HMK-65-S: 1 HS 2 Hair Strainer 1 SKEY Lift Out Key	26 1/8"	23 7/8"
FCBST 6532	1 - 32" Slot 1 - CST 32 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - TNAS Threaded Nipple	1 - HMK-65-S: 1 HS 2 Hair Strainer 1 SKEY Lift Out Key	34 1/8"	31 7/8"
FCBST 6536	1 - 36" Slot 1 - CST 36 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - TNAS Threaded Nipple	1 - HMK-65-S: 1 HS 2 Hair Strainer 1 SKEY Lift Out Key	38 1/8"	35 7/8"
FCBST 6542	1 - 42" Slot 1 - CST 24 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - TNAS Threaded Nipple	1 - HMK-65-S: 1 HS 2 Hair Strainer 1 SKEY Lift Out Key	44 1/8"	41 7/8"
FCBST 6548	1 - 48" Slot 1 - CST 48 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - TNAS Threaded Nipple	1 - HMK-65-S: 1 HS 2 Hair Strainer 1 SKEY Lift Out Key	50 1/8"	47 7/8"
FCBST 6560	1 - 60" Slot 1 - CST 60Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - TNAS Threaded Nipple	1 - HMK-65-S: 1 HS 2 Hair Strainer 1 SKEY Lift Out Key	62 1/8"	59 7/8"


**Finishes** 

**Infinity Drain** 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.infinitydrain.com

□ Satin Stainless (SS)



□ Polished Stainless (PS)



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

□ Matte Black (BK)

□ Satin Bronze (SB)

□ Oil Rubbed Bronze (ORB)



## **CUSTOM DOUBLE WATERPROOFING DRAINS**

If you can imagine it, we can manufacture it. Infinity Drain\* offers a variety of customized drainage solutions to your exact specification. Customize length, outlets, configuration, styles, and finishes.



### **NEW** Next Day Custom

- Purchase orders and sign offs received by 10am ET will ship the following day
- · Completed custom form must accompany purchase order
- Straight configuration and custom lengths up to 96"
- Grate Styles: Wedge Wire, Offset Slotted, Tile Insert Frame
- Installation types: Fixed Flange (FF), Flanged with Schluter\* Kerdi (FCS), and Double Waterproofing (FCB)
- Custom outlet placement for multiple outlets
- Finishes: Satin Stainless, Polished Stainless, Oil Rubbed Bronze, Satin Bronze and Matte Black



### Standard Custom

- Purchase orders and sign offs received by 10am ET will ship within 15 business days
- · Completed custom form must accompany purchase order
- Straight configuration and custom lengths up to 96"
- Any standard grate style options
- Installation types: Fixed Flange (FF), Flanged with Schluter\* Kerdi (FCS), and Double Waterproofing (FCB)
- Custom outlet placement for multiple outlets
- Finishes: Satin Stainless, Polished Stainless, Oil Rubbed Bronze, Satin Bronze and Matte Black



## Cu

## Custom-Custom

- Specialty installation options (Sink drain, Elevator drain, Threshold drain, Vinyl Clamp drain, etc.)
- · Any shape and configuration
- · Any installation type
- Any outlet type
- · Any finish. Standard finishes and color match finish options available.



**CUSTOM** 


## **CLICK HERE - TO LEARN MORE ABOUT CUSTOM FABRICATION**

For additional information regarding Custom Fabrication, Please contact Technical Support at info@infinitydrain.com

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066

www.infinitydrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.