
ID Infinity Drain

.



S-LAG 38 Series LOW PROFILE SITE SIZABLE PVC

- S-LAG 3836 36" Complete Kit
- S-LAG 3848 48" Complete Kit
- S-LAG 3860 60" Complete Kit
- S-LAG 3872 72" Complete Kit
- S-LAG 3896 96" Complete Kit

NOT INTENDED for installation across a barrier-free threshold

for water in channel or sheeting on shower floor.

Pan, Copper Pan, or Fiberglass

line to increase flow rates

Flow rate - 9 gpm per outlet

Compatible with: PVC Liner, Rubber Liner (Chloraloy ®), Hot Mop, Lead


Flow rate measured at outlet only. Measurement does not account

Additional outlets can be added and combined into a larger waste

Features

- Modify length and outlet location on site
- Indoor or outdoor use
- PVC Channel
- Low profile 1" Height
- 12 gauge, 316L stainless steel Wedge Wire grate
- Works with 2" clamp down floor with 2" throat/strainer size (not included)

Installation

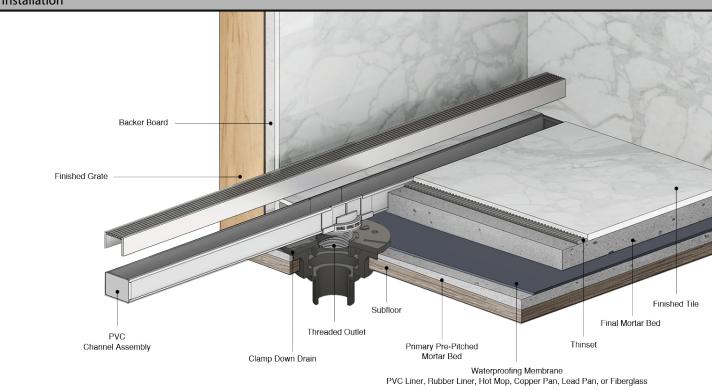

Care & Maintenance

S-LAG 38 stainless steel linear drain top grates are made of 316L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Compound 302® may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.lnfinitydrain.com






NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.


ID Infinity Drain

S-LAG 3836

S-LAG 3848

S-LAG 3860

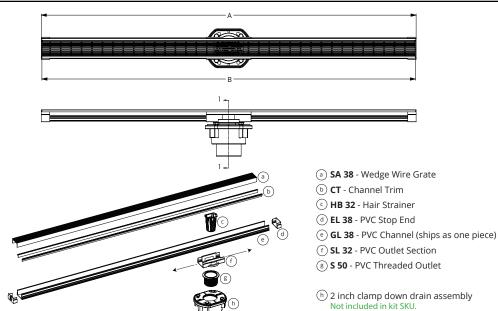





SECTION A-A

| Model Number | Complete Kit Contents | A (Maximum Overall Length) | B (Maximum Grate Length) |
|--------------|---|-------------------------------|-----------------------------|
| S-LAG 3836 | SA 3836 Stainless Steel Grate GL 3836 PVC Channel EL 38 PVC Stop End SL 32 PVC Outlet Section S 50 PVC Threaded Outlet HMK-38-A: HB 32 Hair Basket AKEY Lift Out Key CT 36 Channel Trim CS 3836 Channel Spacer | 36" | 35 7/8" |
| S-LAG 3848 | SA 3848 Stainless Steel Grate GL 3848 PVC Channel EL 38 PVC Stop End SL 32 PVC Outlet Section S 50 PVC Threaded Outlet HMK-38-A: HB 32 Hair Basket AKEY Lift Out Key CT 48 Channel Trim CS 3848 Channel Spacer | 48" | 47 7/8" |
| S-LAG 3860 | SA 3860 Stainless Steel Grate GL 3860 PVC Channel EL 38 PVC Stop End SL 32 PVC Outlet Section S 50 PVC Threaded Outlet HMK-38-A: HB 32 Hair Basket AKEY Lift Out Key CT 60 Channel Trim CS 3860 Channel Spacer | 60" | 59 7/8″ |

(Material can be Cast Iron, ABS, or PVC)

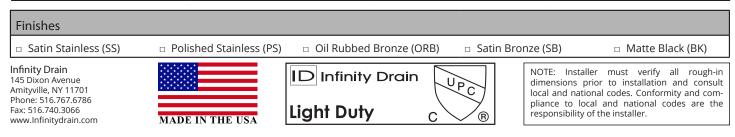

ID Infinity Drain

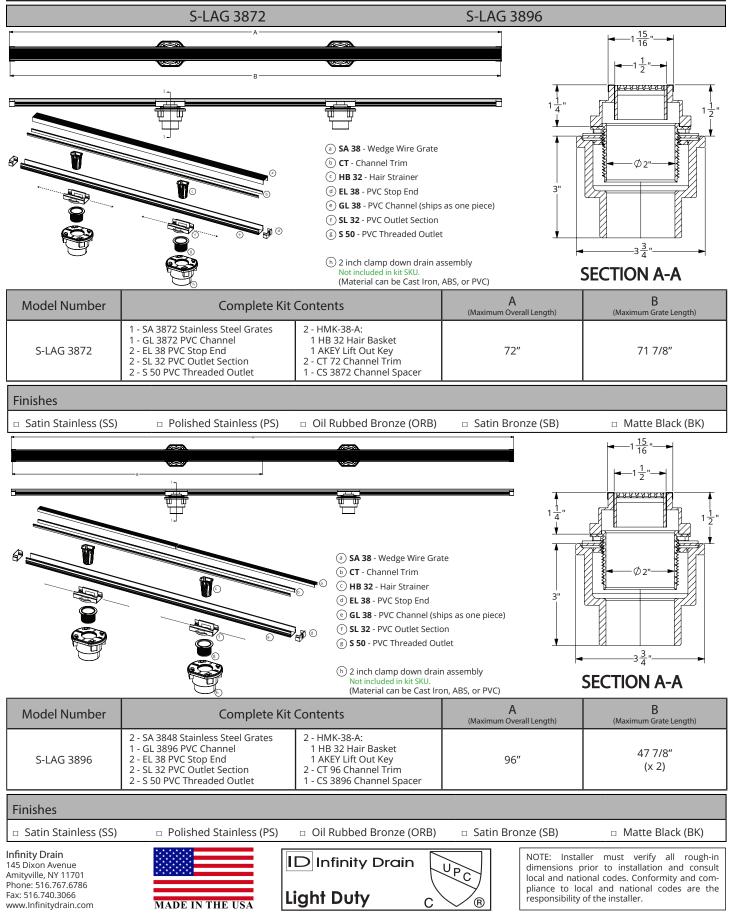

FM528-11-21

П