
ID Infinity Drain

.

.



S-LAG 65 Low Profile Site Sizable Series

- S-LAG 6536 36" Complete Kit
- S-LAG 6548 48" Complete Kit
- S-LAG 6560 60" Complete Kit
- S-LAG 6572 72" Complete Kit
- S-LAG 6596 96" Complete Kit

NOT INTENDED for installation across a barrier-free threshold

for water in channel or sheeting on shower floor.

Pan, Copper Pan, or Fiberglass

line to increase flow rates

Flow rate - 9 gpm per outlet

Compatible with: PVC Liner, Rubber Liner (Chloraloy ®), Hot Mop, Lead

Flow rate measured at outlet only. Measurement does not account

Additional outlets can be added and combined into a larger waste

Features

- 12 gauge, 316L stainless steel Wedge Wire grate
- Modify length and outlet location on site
- Indoor or outdoor use
- PVC Channel
- Low profile 1" Height
- Works with 2" clamp down floor with 2" throat/strainer size (not included)

Installation

S Site Sizable **PVC Channel** Backer Board **Finished Grate Finished Tile** Subfloor Final Mortar Bed Threaded Outlet PVC S 50 Thinset Channel Assembly Primary Pre-Pitched Mortar Bed Waterproofing Membrane PVC Liner, Rubber Liner, Hot Mop, Copper Pan, Lead Pan, or Fiberglass


Care & Maintenance

S-LAG 65 stainless steel linear drain top grates are made of 316L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Compound 302® may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786

www.Infinitydrain.com






NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Fax: 516.740.3066

ID Infinity Drain

S-LAG 6548

S-LAG 6560

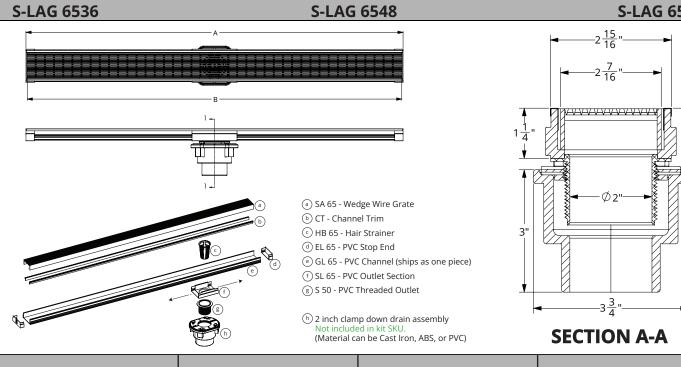

Model Number	Complete Kit Contents	A (Maximum Overall Length)	B (Maximum Grate Length)
S-LAG 6536	 SA 6536 Stainless Steel Grate GL 6536 PVC Channel CS 6536 Channel Spacer EL 65 PVC Stop Ends SL 65 PVC Outlet Section S 50 PVC Threaded Outlet HMK-65-A: HB 65 Hair Basket AKEY Lift Out Key CT 36 Channel Trims 	36"	35 7/8"
S-LAG 6548	 SA 6548 Stainless Steel Grate GL 6548 PVC Channel CS 6548 Channel Spacer EL 65 PVC Stop Ends SL 65 PVC Outlet Section S 50 PVC Threaded Outlet HMK-65-A: HB 65 Hair Basket AKEY Lift Out Key CT 48 Channel Trims 	48″	47 7/8"
S-LAG 6560	 SA 6560 Stainless Steel Grate GL 6560 PVC Channel CS 6560 Channel Spacer EL 65 PVC Stop Ends SL 65 PVC Outlet Section S 50 PVC Threaded Outlet HMK-65-A: HB 65 Hair Basket AKEY Lift Out Key CT 60 Channel Trims 	60"	59 7/8"
Finishes			
🗆 Satin Stainless (SS) 🛛 🗆 Poli	shed Stainless (PS) 🛛 🗆 Oil Rubbed	Bronze (ORB) 🛛 Satin Bronze	(SB) 🛛 Matte Black (BK)
Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinitydrain.com MADE	ID Infinity Light Duty		TE: Installer must verify all rough-in nensions prior to installation and consult al and national codes. Conformity and com- ance to local and national codes are the ponsibility of the installer.

FM529-06-22

ID Infinity Drain

S-LAG 6596

