
# ID Infinity Drain

.



## **FFST Series** Fixed Flange Slot Drain

- FFST 24 24" Complete Kit
- FFST 32 32" Complete Kit
- FFST 36 36" Complete Kit
- FFST 42 42" Complete Kit
- FFST 48 48" Complete Kit


## FFST 60 - 60" Complete Kit

#### Features

- Fixed flange with centered outlet location
- Indoor or outdoor use
- 16 gauge, 304L stainless steel slot and channel assembly
- 12 gauge Tile Insert clean out
- Pre pitched channel
- Clean out can be removed for cleaning

#### NOT Site Sizable<sup>®</sup> Compatible with: liquid applied or fabric sheet membranes

- Flow rate 9 gpm per outlet
  - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
  - Additional outlets can be added and combined into a larger waste line to increase flow rates

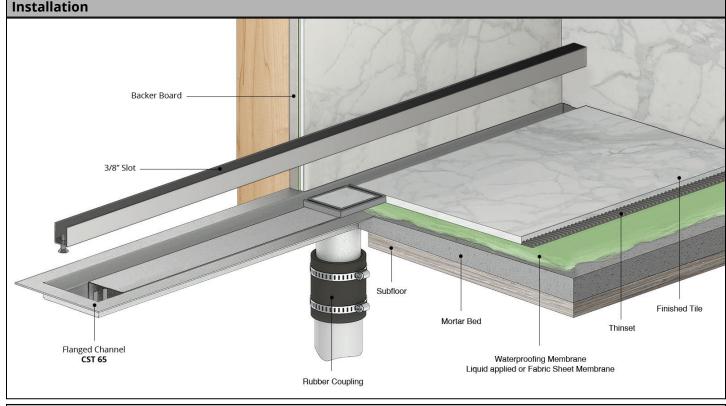


#### Care & Maintenance

FFST 65 stainless steel linear drains are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite® may be needed. For Polished Stainless and other finishes we recommend a mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite®. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.


Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.infinitydrain.com






NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

### **D** Infinity Drain

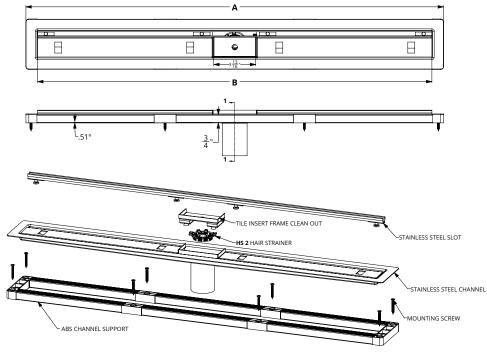



Model Number	Complete Kit Contents	A (Maximum Overall Length)	<b>B</b> (Maximum Slot Length)
FFST 24	1 - 24" Slot 1 - CST 24 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - HS 2 Hair Strainer 1 - AKEY Lift Out Key	26"	23 7/8"
FFST 32	1 - 32" Slot 1 - CST 32 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - HS 2 Hair Strainer 1 - AKEY Lift Out Key	34"	31 7/8"
FFST 36	1 - 36" Slot 1 - CST 36 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - HS 2 Hair Strainer 1 - AKEY Lift Out Key	38″	35 7/8"
FFST 42	1 - 42" Slot 1 - CST 42 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - HS 2 Hair Strainer 1 - AKEY Lift Out Key	44"	41 7/8"
FFST 48	1 - 48" Slot 1 - CST 48 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - HS 2 Hair Strainer 1 - AKEY Lift Out Key	50"	47 7/8"
FFST 60	1 - 60" Slot 1 - CST 60 Fixed Flange Slot Channel 1 - Tile Insert Clean Out 1 - HS 2 Hair Strainer 1 - AKEY Lift Out Key	62"	59 7/8"



MADE IN THE USA

FM533-12-19

www.infinitydrain.com

С

R


## ID Infinity Drain

### **FFST CUSTOM**

			X			
		Y3		Y1	Y2	
tock Finishes						
Satin Stainless	Polished Stainless	🗆 Matte Black	🗆 Satin Bronze	Oil Rubbed Bronze	🗆 Matte White	
Other* (specify):						
Desired finished dim For lengths greater th	nan 60", multiple grates are suppli	ed, unless otherwise noted		e: Y1 Y2	_ Y3	
Rush charge applied	Per set-up. Turnaround is 5 busine rt not provided with custom order		sh does not apply to some custon	n designs, please contact Infinity Dra	in for details)	
Customer:				Job Name:		
Approved by:			Date:			

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.infinitydrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.