ID Infinity Drain

NOT Site Sizable®

Flow rate - 9 gpm per outlet

line to increase flow rates



FTAS 65 Side Outlet Series

- FTAS 6524 24" Complete Kit
- FTAS 6532 32" Complete Kit
- FTAS 6536 36" Complete Kit
- FTAS 6542 42" Complete Kit
- FTAS 6548 48" Complete Kit
- FTAS 6560 60" Complete Kit

Compatible with: liquid applied or fabric sheet membranes

for water in channel or sheeting on shower floor.


Flow rate measured at outlet only. Measurement does not account

Additional outlets can be added and combined into a larger waste

Features

- 2" Centered no hub side outlet.
- Indoor or outdoor use
- 16 gauge, 304L stainless steel channel
- 12 gauge, 316L stainless steel grate
- Pre pitched channel
- Grate can be removed for cleaning

Installation

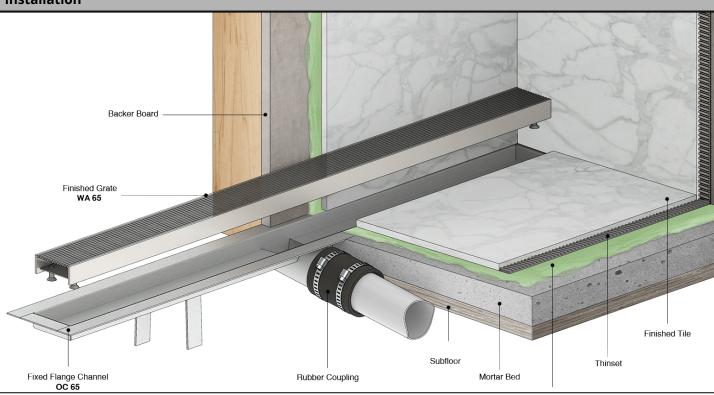


Care & Maintenance

FTAS 65 stainless steel linear drain top grates are made of 316L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite® may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain


145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.lnfinitydrain.com







NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain





GRATE CAN BE ADJUSTED UPWARDS AN ADDITIONAL 1/2"



SECTION 1-1

(a) WA 65 - Stainless Steel Grate
(b) OC 65 - Stainless Steel Channel

CF 65 - Channel Feet

Model Number	Complete Kit Contents	A (Maximum Overall Length)	B (Maximum Grate Length)
FTAS 6524	1 - WA 6524 Grate 1 - OC 6524 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - HMK-A: 1 AKEY Lift Out Key	26 1/8"	23 7/8"
FTAS 6532	1 - WA 6532 Grate 1 - OC 6532 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out Key	34 1/8″	31 7/8"
FTAS 6536	1 - WA 6536 Grate 1 - OC 6536 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out Key	38 1/8"	35 7/8"
FTAS 6542	1 - WA 6542 Grate 1 - OC 6542 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out Key	44 1/8"	41 7/8"
FTAS 6548	1 - WA 6548 Grate 1 - OC 6548 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out Key	50 1/8"	47 7/8"
FTAS 6560	1 - WA 6560 Grate 1 - OC 6560 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out Key	62 1/8"	59 7/8"
	FTAS 6524 FTAS 6532 FTAS 6536 FTAS 6542 FTAS 6548	FTAS 65241 - WA 6524 Grate 1 - OC 6524 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - MK-A: 1 AKEY Lift Out KeyFTAS 65321 - WA 6532 Grate 1 - OC 6532 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out KeyFTAS 65361 - WA 6536 Grate 1 - OC 6536 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out KeyFTAS 65361 - WA 6536 Grate 1 - OC 6536 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out KeyFTAS 65421 - WA 6542 Grate 1 - OC 6542 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - OC 6542 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - OC 6542 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out KeyFTAS 65421 - WA 6548 Grate 1 - OC 6548 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out KeyFTAS 65481 - WA 6548 Grate 1 - OC 6548 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out KeyFTAS 65481 - WA 6560 Grate 1 - OC 6506 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK-A: 1 AKEY Lift Out Key	Model NumberComplete Kit Contents(Maximum Overall Length)FTAS 65241 - WA 6524 Grate 1 - OC 6524 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - HMK.A: 1 AKEY Lift Out Key26 1/8"FTAS 65321 - WA 6532 Grate 1 - OC 6532 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - OC 6532 Fixed Flange Channel 2 - CF 65 Adjustable Channel Feet 1 - HMK.A: 1 AKEY Lift Out Key34 1/8"FTAS 65361 - WA 6536 Grate 1 - OC 6536 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK.A: 1 AKEY Lift Out Key38 1/8"FTAS 65361 - WA 6536 Grate 1 - OC 6532 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK.A: 1 AKEY Lift Out Key38 1/8"FTAS 65421 - WA 6542 Grate 1 - OC 6542 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK.A: 1 AKEY Lift Out Key44 1/8"FTAS 65481 - WA 6548 Grate 1 - OC 6548 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK.A: 1 AKEY Lift Out Key50 1/8"FTAS 65481 - WA 6548 Grate 1 - OC 6564 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK.A: 1 - HMK.A: 1 - KEY Lift Out Key50 1/8"FTAS 65601 - WA 650 Grate 1 - OC 6564 Fixed Flange Channel 2 - CF 65 Adjustabe Channel Feet 1 - HMK.A: 1 - KEY Lift Out Key62 1/8"



Satin Stainless (SS)

Polished Stainless (PS)

Oil Rubbed Bronze (ORB)

Satin Bronze (SB)

Matte Black (BK)

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.lnfinitydrain.com



ID Infinity Drain

NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CUSTOM SIDE OUTLET SERIES DRAINS

If you can imagine it, we can manufacture it. Infinity Drain^{*} offers a variety of customized drainage solutions to your exact specification. Customize length, outlets, configuration, styles, and finishes.



NEW Next Day Custom

- Purchase orders and sign offs received by 10am ET will ship the following day
- Completed custom form must accompany purchase order
- Straight configuration and custom lengths up to 96"
- Grate Styles: Wedge Wire, Offset Slotted, Tile Insert Frame
 - Installation types: Fixed Flange (FF), Flanged with Schluter* Kerdi (FCS), and Double Waterproofing (FCB)
 - Custom outlet placement for multiple outlets
 - · Finishes: Satin Stainless, Polished Stainless, Oil Rubbed Bronze, Satin Bronze and Matte Black



Standard Custom

- Purchase orders and sign offs received by 10am ET will ship within 15 business days
- · Completed custom form must accompany purchase order
- Straight configuration and custom lengths up to 96"
- Any standard grate style options
- Installation types: Fixed Flange (FF), Flanged with Schluter* Kerdi (FCS), and Double Waterproofing (FCB)
- Custom outlet placement for multiple outlets
- Finishes: Satin Stainless, Polished Stainless, Oil Rubbed Bronze, Satin Bronze and Matte Black



Custom-Custom

- Specialty installation options (Sink drain, Elevator drain, Threshold drain, Vinyl Clamp drain, etc.)
- Any shape and configuration
- Any installation type Any outlet type
- · Any finish. Standard finishes and color match finish options available.


CLICK HERE - TO LEARN MORE ABOUT CUSTOM FABRICATION

For additional information regarding Custom Fabrication, Please contact Technical Support at info@infinitydrain.com

Infinity Drain

145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinitvdrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

FM047-04-22