




ELEVATOR DRAIN

Custom Form

Infinity Drain elevator drains are constructed of 16 gauge 304L ASTM A240 stainless steel with a 4" No-hub center outlet. The elevator drain is designed to mitigate waterflow into a hoist-way by way of a drain channel into an outlet section. Standard grate is the wedge wire (SA) grate constructed of 316L stainless steel which is ADA compliant, can be specified to include tamper resistant locking screws to secure the grate. Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Customize the length of the drain to match your onsite conditions

It is important to note that any alterations to the standard design might affect the drain's guaranteed performance of 100 gallons per minute

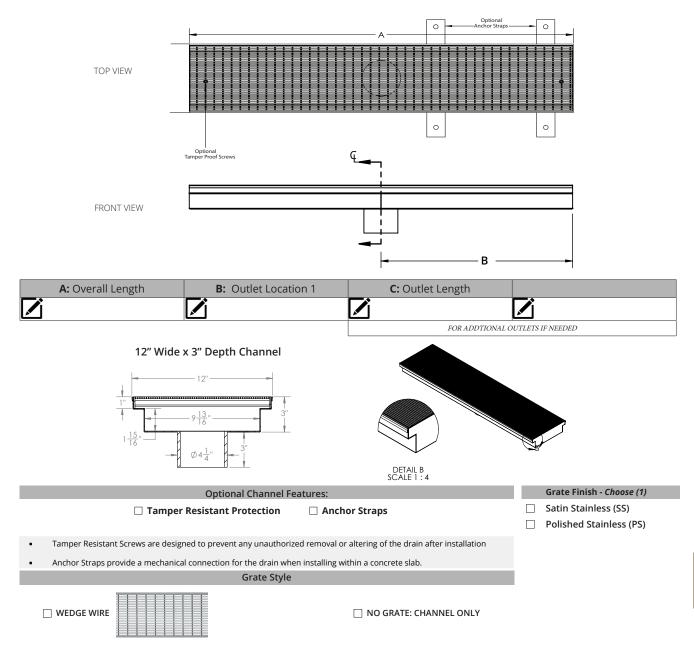

Terms and Conditions:

By signing this form, you are agreeing to the terms and conditions herein. All details and finishes stated are correct. All dimensions are correct and are to be held within a tolerance of +/- 1/16". All other details and dimensions that are specified as "standard" are subject to manufacturer's tolerance and change without notice. We can assume no responsibility for use of superceded or void data. All custom orders are non-cancellable, non-returnable and non-refundable.

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.infinitydrain.com







