


ID Infinity Drain




S-AS 38 Stainless Steel Site Sizable Series

- S-AS 3836 - 36" Complete Kit
- S-AS 3848 - 48" Complete Kit
- S-AS 3860 - 60" Complete Kit
- S-AS 3872 - 72" Complete Kit
- S-AS 3896 - 96" Complete Kit

Features

- 12 gauge, 316L wedge wire grate
- Modify length and outlet location on site
- Indoor or outdoor use
- Stainless steel channel
- Works with 2" clamp down floor with 2" throat/strainer size *(not included)*
- Compatible with: PVC Liner, Rubber Liner (Chloraloy®), Hot Mop, Lead Pan, Copper Pan, or Fiberglass
- Flow rate - 9 gpm per outlet
 - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
 - Additional outlets can be added and combined into a larger waste line to increase flow rates

Installation

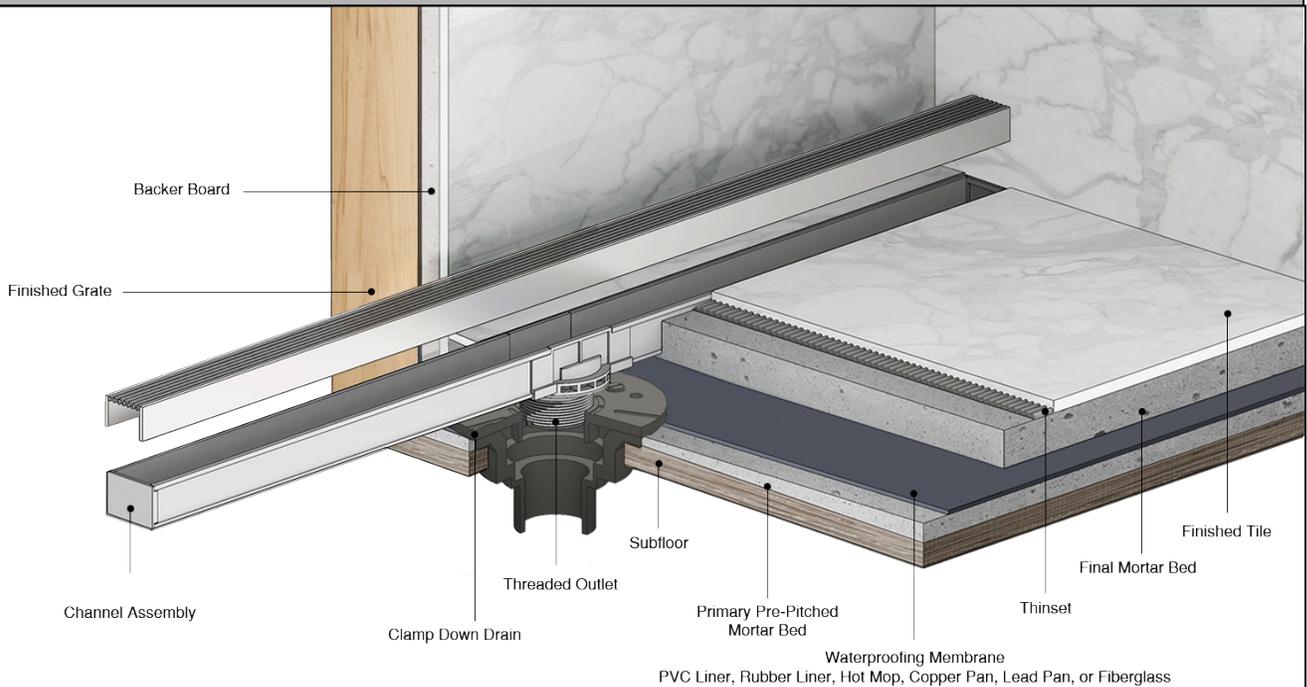

Care & Maintenance

S-AS 38 stainless steel linear drain top grates are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Compound 302® may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinitydrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain


S-AS 3836

S-AS 3848

S-AS 3860

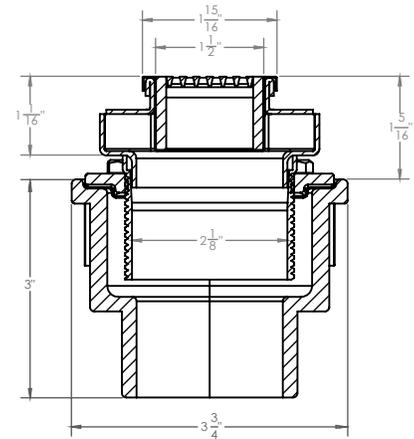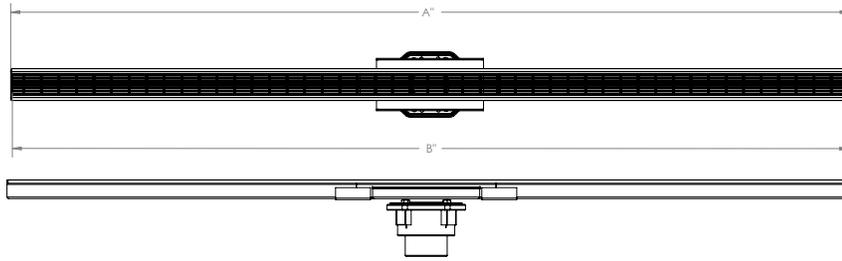

SECTION A-A

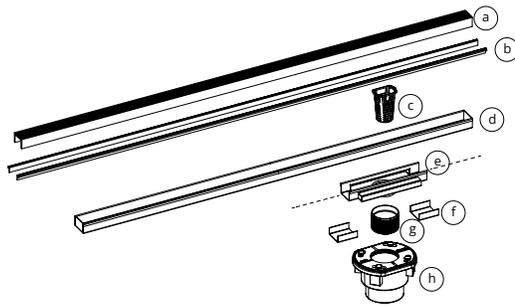

- (a) SA 38 - Wedge Wire Grate
- (b) CT - Channel Trim
- (c) HB 32 - Hair Basket
- (d) LC 3 8 - Stainless Steel Channel (ships as one piece)
- (e) LF 38 - Stainless Steel Outlet Section
- (f) GJS 38 - Stainless Steel Joiner Strip
- (g) TNAS - Threaded Nipple
- (h) 2 inch clamp down drain assembly
Not included in kit SKU.
(Material can be Cast Iron, ABS, or PVC)

Model Number	Complete Kit Contents		A Maximum Overall Length	B Maximum Grate Length
S-AS 3836	1 - SA 3836 Stainless Steel Grate 1 - LC 6532 Channel 1 - LF 65 8" Outlet Section 2 - GJS 65 Joiner Strips 1 - TNAS Threaded Nipple	1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key 2 - CT 36 Channel Trims	36"	35 7/8"
S-AS 3848	1 - SA 3848 Stainless Steel Grate 1 - LC 6540 Channel 1 - LF 65 8" Outlet Section 2 - GJS 65 Joiner Strips 1 - TNAS Threaded Nipple	1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key 2 - CT 48 Channel Trims	48"	47 7/8"
S-AS 3860	1 - SA 3860 Stainless Steel Grate 1 - LC 6552 Channel 1 - LF 65 8" Outlet Section 2 - GJS 65 Joiner Strips 1 - TNAS Threaded Nipple	1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key 2 - CT 60 Channel Trims	60"	59 7/8"

Finishes

- Satin Stainless (SS)
- Polished Stainless (PS)
- Oil Rubbed Bronze (ORB)
- Satin Bronze (SB)
- Matte Black (BK)
- Satin Brass (SR)
- Satin Champagne (SC)
- Polished Gold (PG)
- Polished Brass (PB)
- Gunmetal (GM)
- Matte White (MW)

Infinity Drain

145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.infinitydrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.


ID Infinity Drain

S-AS 3872

S-AS 3896

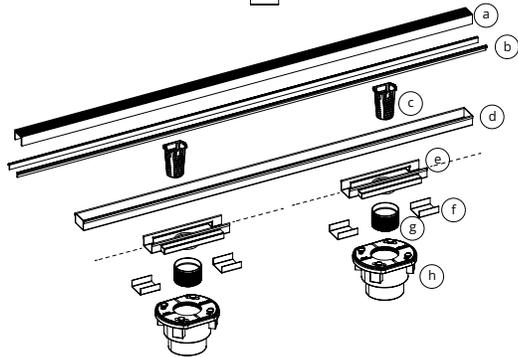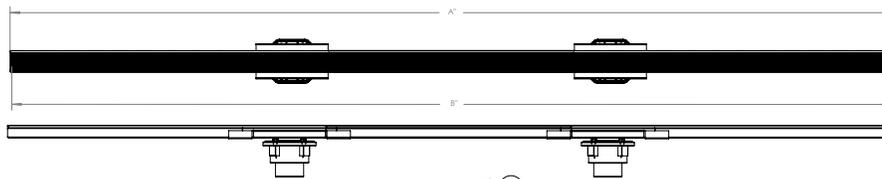

- (a) SA 38 - Wedge Wire Grate
- (b) CT - Channel Trim
- (c) HB 32 - Hair Basket
- (d) LC 3 8 - Stainless Steel Channel (ships as one piece)
- (e) LF 38 - Stainless Steel Outlet Section
- (f) GJS 38 - Stainless Steel Joiner Strip
- (g) TNAS - Threaded Nipple
- (h) 2 inch clamp down drain assembly
Not included in kit SKU.
(Material can be Cast Iron, ABS, or PVC)

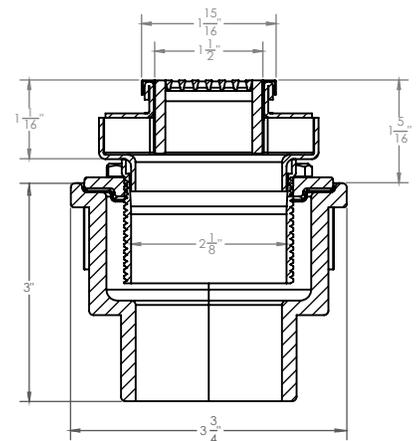

SECTION A-A

Model Number	Complete Kit Contents	A Maximum Overall Length	B Maximum Grate Length
S-AS 3872	1 - SA 3872 Stainless Steel Grates 1 - LC 6572 Channel 2 - LF 65 8" Outlet Sections 4 - GJS 65 Joiner Strips 2 - TNAS Threaded Nipples	72"	71 7/8"
S-AS 3896	2 - SA 3848 Stainless Steel Grates 1 - LC 6588 Channel 2 - LF 65 8" Outlet Sections 4 - GJS 65 Joiner Strip 2 - TNAS Threaded Nipples	96"	47 7/8"

Optional Components

TNAS-2	2" Long Stainless Steel Rescue Nipple
TNAS-3	3" Long Stainless Steel Rescue Nipple
TNAS-4	4" Long Stainless Steel Rescue Nipple
TNRN-P	PVC Threaded Extension Nipple
UCP 2	Universal 2" Clamping Plate
UCP 42	Universal Reducing Plate (Adapts 4" or 3" existing throat size to 2")

Available components for longer lengths

SA 3836	40" Stainless Steel Grate
SA 3848	48" Stainless Steel Grate
SA 3860	60" Stainless Steel Grate
SA 3872	72" Stainless Steel Grate
SC 6548	48" Stainless Open Ended Channel
SC 6596	96" Stainless Open Ended Channel
LC 6528	28" Stainless Closed Channel
LC 6540	40" Stainless Closed Channel
LC 6552	52" Stainless Closed Channel
LC 6564	64" Stainless Closed Channel
LC 6588	88" Stainless Closed Channel

Infinity Drain
 145 Dixon Avenue
 Amityville, NY 11701
 Phone: 516.767.6786
 Fax: 516.740.3066
 www.Infinitydrain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.