FXAS 125 Series




FXAS 125 | Fixed Length

- 12 gauge 316 Stainless Steel grate and channel
- Pre-pitched channel with "Fixed" lengths and "Fixed" center outlet
- Not site sizeable
- Indoor or outdoor use
- 4" clamp down floor drain with 3" throat (strainer size)
- Uses Hot Mop, Lead Pan, PVC Vinyl Liner, Rubber Liner (Chloraloy™)
 Copper Pan or Fiberglass waterproofing
- Grate can be removed completely for cleaning
- Flow rate 21 GPM per outlet*
 *Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.



Installation (FX) Fixed

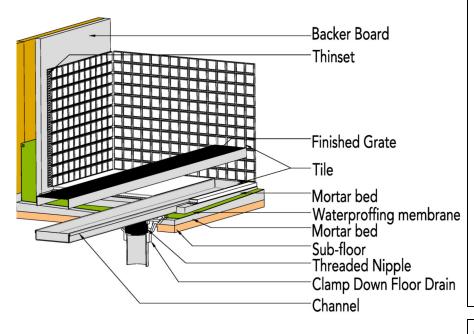

Infinity Drain

18 Secatoag Avenue Port Washington, NY 11050 Phone: 516.767.6786 Fax: 516.740.3066 www.InfinityDrain.com



INFINITY DRAIN
CANADA - CSA B 125.2
USA - ASME A112.18.2



Complete Kits:

FXAS 12532 32" Complete Kit FXAS 12536 36" Complete Kit FXAS 12542 42" Complete Kit FXAS 12548 48" Complete Kit FXAS 12560 60" Complete Kit

SA 12532 32" Stainless Steel Grate

Components:

SA 12536 36" Stainless Steel Grate
SA 12542 42" Stainless Steel Grate
SA 12548 48" Stainless Steel Grate
SA 12560 60" Stainless Steel Grate
XC 12532 32" Stainless Steel Fixed Channel
XC 12536 36" Stainless Steel Fixed Channel
XC 12542 42" Stainless Steel Fixed Channel
XC 12548 48" Stainless Steel Fixed Channel
XC 12560 60" Stainless Steel Fixed Channel
TN4A Stainless Steel Threaded Nipple
CDI 43 Cast Iron Drain Body

Additional Clamp Down Drains:

CDA 43 Clamp Down Drain ABS
CDP 43 Clamp Down Drain PVC
CDIT 43 Clamp Down Drain Cast Iron
(Threaded Outlet)
CDIC 43 Clamp Down Drain Cast Iron
(Inside Caulk Outlet)


Optional Components:

UCP 4 Universal 4" Clamping Plate

Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

FXAS 12536 Specifications



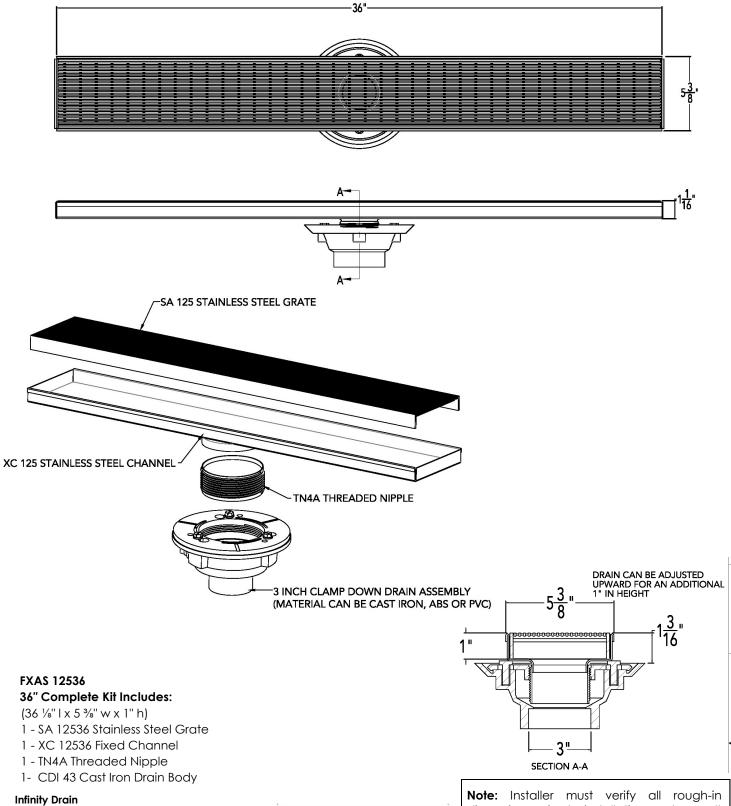

18 Secatoag Avenue Port Washington, NY 11050 Phone: 516.767.6786 Fax: 516.740.3066 www.InfinityDrain.com



INFINITY DRAIN USA - ASME A112.18.2



dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Page 2 of 2