
ID Infinity Drain



FCSAS 125 Series


Fixed Flange with Schluter® KERDI

- FCSAS 12532 32" Complete Kit
- FCSAS 12536 36" Complete Kit
- FCSAS 12542 42" Complete Kit
- FCSAS 12548 48" Complete Kit
- FCSAS 12560 60" Complete Kit

Features

- Channel provided with factory applied Schluter® KERDI
- KERDI bond to channel covered under Infinity Drain warranty
- 16 gauge, 304L stainless steel channel
- 12 gauge, 316L stainless steel grate
- Pre pitched channel
- Grate can be removed for cleaning

- NOT Site Sizable®
- Compatible with: liquid applied or fabric sheet membranes
- Flow rate 21 gpm per 3" outlet
 - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
 - Additional outlets can be added and combined into a larger waste line to increase flow rates

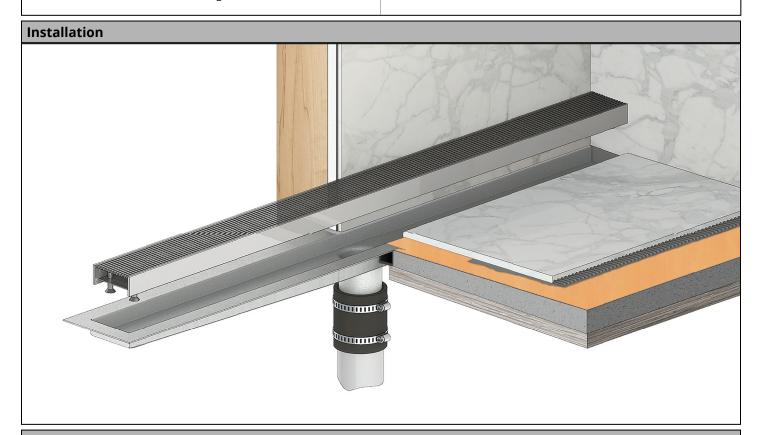


Care & Maintenance

FCSAS 125 stainless steel linear drains are made of 316L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite® may be needed. For Polished Stainless and other finishes we recommend a mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite® . Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain


145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.infinitydrain.com






NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

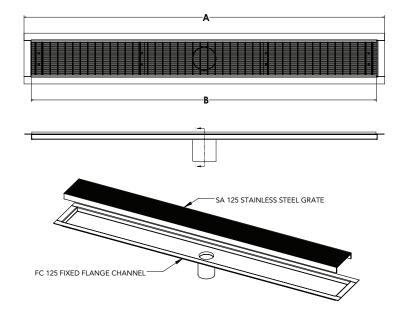

GRATE CAN BE ADJUSTED UPWARDS AN ADDITIONAL 1/2"



SECTION 1-1


| Model Number | Complete Kit Contents | A (Maximum Overall Length) | B (Maximum Grate Length) |
|-----------------|---|----------------------------|------------------------------------|
| FCSAS 12532 | 1 - SA 12532 Grate 1 - FCS 12532 Channel with Schluter® KERDI 1 - AKEY Lift Out Key | 34" | 31 7/8" |
| FCSAS 12536 | 1 - SA 12536 Grate 1 - FCS 12536 Channel with Schluter® KERDI 1 - AKEY Lift Out Key | 38" | 35 7/8" |
| FCSAS 12542 | 1 - SA 12542 Grate 1 - FCS 12542 Channel with Schluter® KERDI 1 - AKEY Lift Out Key | 44" | 41 7/8" |
| FCSAS 12548 | 1 - SA 12548 Grate 1 - FCS 6548 Channel with Schluter® KERDI 1 - AKEY Lift Out Key | 50" | 47 7/8" |
| FCSAS 12560 | 1 - SA 12560 Grate 1 - FCS 6560 Channel with Schluter® KERDI 1 - AKEY Lift Out Key | 62" | 59 7/8" |

| Stock Finishes | | | | |
|-------------------|----------------------|---------------|---------------|----------------|
| □ Satin Stainless | □ Polished Stainless | □ Matte Black | □ Matte White | □ Satin Bronze |

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066


www.infinitydrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

FCSAS 125 CUSTOM

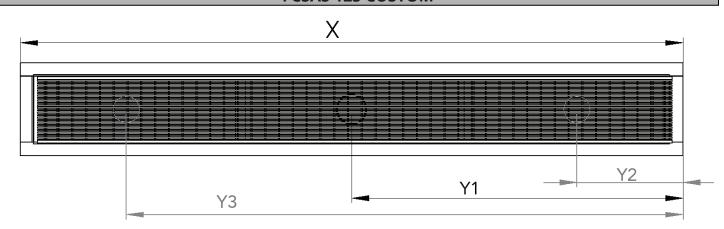


| Custom Finishes | | | | | | |
|-------------------------|------------------------------|---------------------|---------------|---------------|----------------|--|
| □ Satin Stainless | □ Polished Stainless | □ Oil Rubbed Bronze | □ Matte Black | □ Matte White | □ Satin Bronze | |
| NOTE: Custom color mate | ching available upon request | | | | | |

| X: LENGTH: Overall Inside Length of Channel (inches Desired finished dimension For lengths greater than 60", multiple grates are supplied, unless other | , | | |
|---|--|---------------------------------------|--------------|
| Y: OUTLET LOCATION: # of outlets Cen | nter of Outlet(s) to inside right edge: | Y1 Y2 | Y3 |
| RUSH: Yes NO Rush charge applied per set-up. Turnaround is 5 business days, plus si *ABS Channel Support not provided with custom orders | hipping. (Rush does not apply to some custom d | esigns, please contact Infinity Drain | for details) |
| Customer: | | Job Name: | |
| Approved by: | | Date: | |

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.infinitydrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.