ID Infinity Drain



TD 15 Series


TILE DRAIN SUBMITTAL

- TD 15-2I SS Clamp Down Drain Cast Iron
- TD 15-3I PS Clamp Down Drain Cast Iron
- TD 15-2A SS Clamp Down Drain ABS
- TD 15-3A PS Clamp Down Drain ABS
- TD 15-2P SS Clamp Down Drain PVC
- TD 15-3P PS Clamp Down Drain PVC

Features

- 12 gauge 316 Stainless Steel Frame and Body
- ¾" depth inside frame for material
- ¼" drainage gap
- Indoor or outdoor use
- Commercial grade large drain body (Cast Iron, PVC or ABS) with 4" throat
- Grate can be removed completely for cleaning
- Requires traditional 4-way floor pitch
- Flow rate 9 GPM with 2" outlet
- Flow rate 21 GPM with 3" outlet

Installation

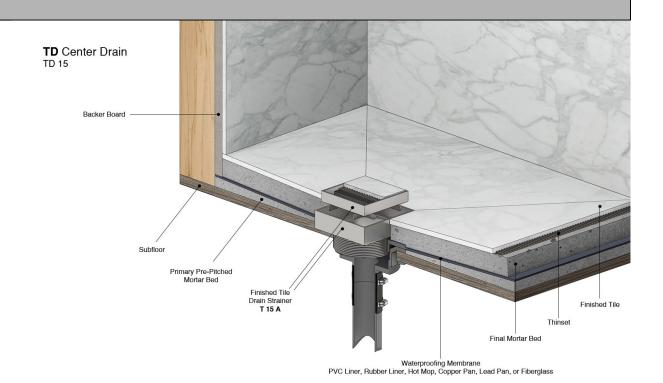

Care & Maintenance

TD 15-2 center drains are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Compound 302® may be needed. For Polished Stainless and Oil Rubbed Bronze we recommend a mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub® with Bleach, or Compound 302®. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain

145 Dixon Avnue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinitydrain.com





CANADA - CSA B 125.2 USA - ASME A112.18.2





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

TD 15-2 Specifications









TD 15-21 8" x 8" Kit with Cast Iron Drain Body No Hub Outlet

(5" L x 5" W x 1 5/16" H)
1 - T 15 A Tile Drain Strainer

1 - CDI 42 Clamp Down Drain Cast Iron

TD 15-2A

8" x 8" Kit with ABS Drain Body

(5" L x 5" W x 1 5/16" H) 1 - T 15 A Tile Drain Strainer

1 - CDA 42 Clamp Down ABS

TD 15-2P

8" x 8" Kit with PVC Drain Body

(5" L x 5" W x 1 5/16" H)

1 - T 15 A Tile Drain Strainer

1 - CDP 42 Clamp Down PVC


Finishes:

- ____ Satin Stainless
- Polished Stainless
- Satin Bronze


Infinity Drain


145 Dixon Avnue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinitydrain.com














Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.