ID Infinity Drain




S-TIFAS 65 Stainless Steel Site Sizable Series

- S-TIFAS 6540 40" Complete Kit
- S-TIFAS 6548 48" Complete Kit
- S-TIFAS 6560 60" Complete Kit
- S-TIFAS 6580 80" Complete Kit
- S-TIFAS 6596 96" Complete Kit

Features

- 12 gauge. 304L stainless steel Tile Insert Frame
- Modify length and outlet location on site
- Indoor or outdoor use
- Stainless steel channel
- Works with 2" clamp down floor with 2" throat/strainer size (not included)
- NOT INTENDED for installation across a barrier-free threshold
- Compatible with: PVC Liner, Rubber Liner (Chloraloy ®), Hot Mop, Lead Pan, Copper Pan, or Fiberglass
- Flow rate 9 gpm per outlet
 - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
 - Additional outlets can be added and combined into a larger waste line to increase flow rates

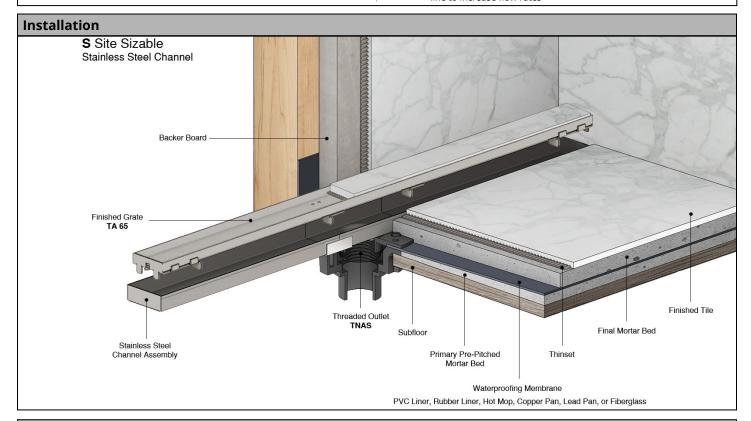

Care & Maintenance

S-TIFAS 65 stainless steel linear drain top grates are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Compound 302® may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain


145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.Infinitydrain.com





NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

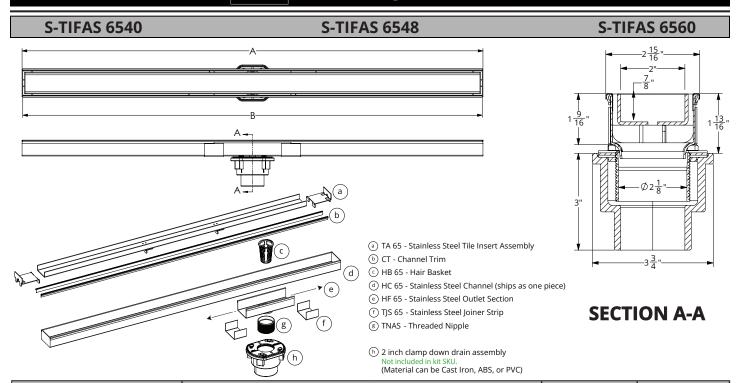

	Model Number	Complete Kit Contents		A Maximum Overall Length	B Maximum Grate Length
	S-TIFAS 6540	1 - TA 6540 Tile Insert Frame 1 - HC 6532 Channel 1 - HF 65 8" Outlet Section 2 - TJS 65 Joiner Strips 1 - TNAS Threaded Nipple	1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key 2 - CT 40 Channel Trims	40"	39 7/8"
l	S-TIFAS 6548	1 - TA 6548 Tile Insert Frame 1 - HC 6540 Channel 1 - HF 65 8" Outlet Section 2 - TJS 65 Joiner Strips 1 - TNAS Threaded Nipple	1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key 2 - CT 48 Channel Trims	48"	47 7/8"
	S-TIFAS 6560	1 - TA 6560 Tile Insert Frame 1 - HC 6552 Channel 1 - HF 65 8" Outlet Section 2 - TJS 65 Joiner Strips 1 - TNAS Threaded Nipple	1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key 2 - CT 60 Channel Trims	60"	59 7/8"

Finishes

□ Satin Stainless (SS)

□ Polished Stainless (PS)

□ Oil Rubbed Bronze (ORB)

□ Satin Bronze (SB)

□ Matte Black (BK)

Infinity Drain

145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066 www.lnfinitydrain.com






NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Page 2 of 3

ID Infinity Drain

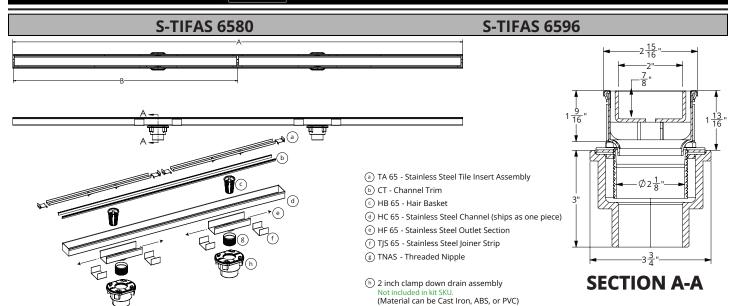

Model Number	Complete Kit Contents		A Maximum Overall Length	B Maximum Grate Length
S-TIFAS 6580	2 - TA 6540 Tile Insert Frames 1 - HC 6572 Channel 2 - HF 65 8" Outlet Sections 4 - TJS 65 Joiner Strips 2 - TNAS Threaded Nipples	1 - ZSIKA M1 Sealant 1 - HMK-65-2A: 2 - HB 65 Hair Basket 1 - AKEY Lift Out Key 2 - CT 80 Channel Trims	80"	39 7/8" (x 2)
S-TIFAS 6596	2 - TA 6548 Tile Insert Frames 1 - HC 6588 Channel 2 - HF 65 8" Outlet Sections 4 - TJS 65 Joiner Strip 2 - TNAS Threaded Nipples	1 - ZSIKA M1 Sealant 1 - HMK-65-2A: 2 - HB 65 Hair Basket 1 - AKEY Lift Out Key 2 - CT 96 Channel Trims	96"	47 7/8" (x 2)

Optional Components					
TNAS-2	2" Long Stainless Steel Rescue Nipple				
TNAS-3	3" Long Stainless Steel Rescue Nipple				
TNAS-4	4" Long Stainless Steel Rescue Nipple				
TNRN-P	PVC Threaded Extension Nipple				
UCP 2	Universal 2" Clamping Plate				
UCP 42	Universal Reducing Plate (Adapts 4" or 3" existing throat size to 2")				
Add Clamp Down Drain					
CDA 22	Clamp Down Drain ABS				
CDI 22	Clamp Down Drain Cast Iron				

Clamp Down Drain PVC

Infinity Drain 145 Dixon Avenue Amityville, NY 11701 Phone: 516.767.6786 Fax: 516.740.3066

www.Infinitydrain.com

CDP 22



Available components for longer lengths TA 6540 40" Tile Insert Frame TE 65 2" Stainless Steel End Section TA 6548 48" Tile Insert Frame TJS 65 Stainless Steel Joiner Strip 60" Tile Insert Frame SHA 65 Stainless Steel 90° Angle Joiner TA 6560 TC 6548 48" Stainless Open Ended Channel HB 65 2" Hair Basket 96" Stainless Open Ended Channel TC 6596 HF 65 8" Stainless Steel Outlet Section HC 6532 32" Stainless Closed Channel **TNAS** Stainless Steel Threaded Nipple HC 6540 40" Stainless Closed Channel CT 40 40" Channel Trim 52" Stainless Closed Channel CT 48 48" Channel Trim HC 6552 72" Stainless Closed Channel 60" Channel Trim HC 6572 CT 60 88" Stainless Closed Channel HC 6588 CT 80 80" Channel Trim CT 96 96" Channel Trim



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.